

Bourdon tube pressure gauge Safety version Model 111.31, welding gauge to ISO 5171

WIKA data sheet PM 01.11



Applications

- For equipment and plants for welding, cutting and allied processes
- Application for oxygen and acetylene
- Increased safety requirements

Special features

- Safety pressure gauge with solid baffle wall designed in compliance with operational safety requirements of EN 837-1 (S3)
- Reliable and cost-effective
- Nominal size 50
- Scale ranges up to 0 ... 400 bar



Bourdon tube pressure gauge model 111.31

Description

Design

ISO 5171

Nominal size in mm

50

Accuracy class

2.5

Scale ranges

0 ... 2.5 to 0 ... 400 bar
or all other equivalent vacuum or combined pressure and vacuum ranges

Pressure limitation

Steady: 3/4 x full scale value

Fluctuating: 2/3 x full scale value

Short time: full scale value

Operating temperature

Ambient: -40 ... +60 °C

Medium: +60 °C maximum

Temperature effect

When the temperature of the measuring system deviates from the reference temperature (+20 °C):
max. $\pm 0.4\%$ /10 K of the span

Standard version

Process connection

Cu-alloy,
lower mount (LM)
1/4 NPT (male), 14 mm flats

Pressure element

Cu-alloy,
≤ 60 bar: C-type
> 60 bar: helical type

Movement

Cu-alloy

Dial

Plastic, white,
with pointer stop pin, black lettering

Pointer

Plastic, black

Case

Zinc diecast with solid baffle wall (Solidfront) and blow-out back

Window


Polycarbonate

Options

- Other process connection
- Case lacquered to customer requirements

Dimensions in mm

Standard version

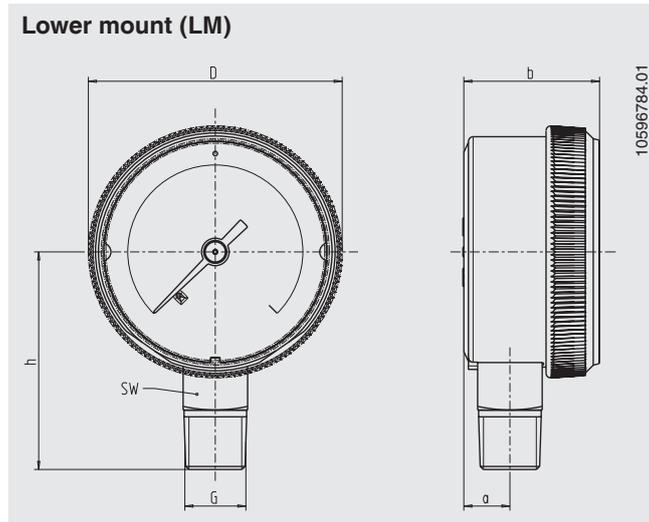

NS	Dimensions in mm					SW	Weight in kg
	a	b	D	G	h ± 1		
50	10	29.5	55.1	1/4 NPT	47.5	14	0.13

Ordering information

Model / Nominal size / Scale range / Connection size / Options

The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKAI
WIKAI Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. (+49) 9372/132-0
Fax (+49) 9372/132-406
E-mail info@wika.de
www.wika.de